

4 Function IP Transmitter

REPLACEMENT TRANSMITTER


92204TX 4 Function IP Transmitter

CONTENTS

1 x IP Transmitter
1 x Lanyard
1 x Instructions



4F Keypad only available

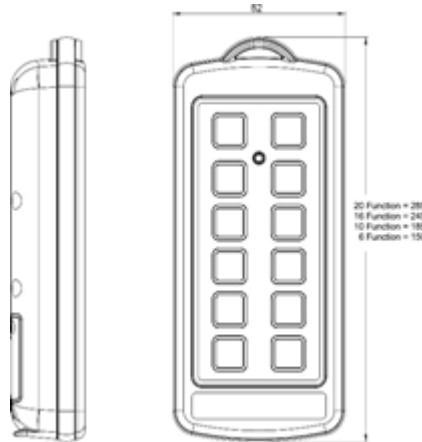

20 Function = 280
16 Function = 245
10 Function = 180
6 Function = 150

TRANSMITTER SPECIFICATION

ENCLOSURE

Material ABS
Switch Type Tactile Dome on PCB Keypad
Functions 4
Identification Pockets for printed text or image insertion

RF

Modulation 2-GFSK. Gaussian Frequency Shift Keying
Frequency 433.050 MHz to 434.790 MHz
Channels 1
Channel Selection Fixed
Technology Hand-held Transmitter
Temperature Range -10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures
Range 60m (200ft)
Aerial Internal – printed on PCB
Transmitted power 1mW Typical

POWER

Batteries 4 x AAA Alkaline Manganese in holder (6 Volts)
Quiescent Current 15µA
Current Transmitting 20mA

PROTECTION

IP Rating 65
Registration codes Over 16 million

INDICATOR

Type 1 x Red LED
Off Transmitter is OFF and in standby mode
Slow flash Transmitter is ON and ready for use (The SET Button has been pressed and released)
On Transmitting (A STOP, SET or Function Button is being pressed)
Fast flash Transmitting – Indication that the battery will need replacing soon

COMPLIANCE

FCC FCC CFR 47-part 15.231
433.9MHz
IC ISED RSS-210 Issue 8
433.9MHz
RoHS Directive 2011/65/EU